


## 86/60

Keratherm

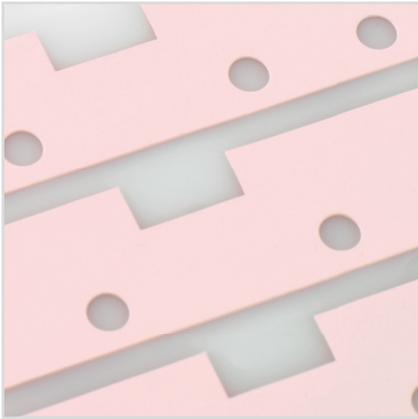

Keratherm 86/60 offers outstanding thermal conductivity, which is achieved by a specially filled silicone elastomer. The excellent electrical insulation properties are thereby retained. On request, these films can also be supplied with fibre glass reinforcement and with or without adhesive coating. The excellent thermal resistance of this film enables the optimum heat transfer to the heat sink.


✓ Optionally available with adhesive coating!

## Applications

- automotives
- audio and video components
- white goods
- power converters (AC-DC, DC-DC)
- engine controllers
- LCD displays

Properties	Unit	86/60
Colour		pink
Assembly		single layer, without glass reinforcement
<b>Thermal Properties</b>		
Thermal resistance $R_{th}$	K/W	0.14
Thermal impedance $R_{ti}$	$^{\circ}\text{Cmm}^2/\text{W}$	56
	$\text{Kin}^2/\text{W}$	0.079
Thermal conductivity $\lambda$	W/mK	4.5
<b>Electrical Properties</b>		
Breakdown voltage $U_{d, ac}$	kV	5.0
Dielectric breakdown $E_{d, ac}$	kV/mm	20
Volume resistivity	$\Omega\text{m}$	$> 600 \times 10^9$
Dielectric loss factor $\tan \delta$	1	0.0
Dielectric constant $\epsilon_r$	1	1.47
<b>Mechanical Properties</b>		
Measured thickness (+/-10%)	mm	0.25
Hardness	Shore A	60 - 75
<b>Physical Properties</b>		
Application temperature	$^{\circ}\text{C}$	-60 to +200
Density	$\text{g}/\text{cm}^3$	1.38
Total mass loss (TML)	Ma.-%	< 0.32
Flame rating	UL-94	V-0**
Possible thickness	mm	0.150 - 0.300

\*\*Kerafol test according to UL

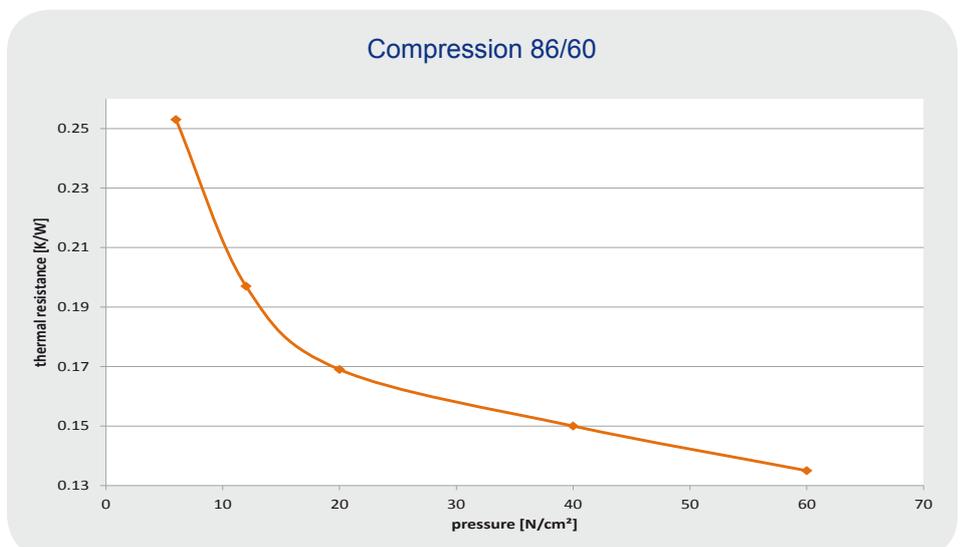

### **Important notes**

The data presented in this leaflet are in accordance with the present state of our knowledge. All statements, technical information and recommendations herein are based on tests we believe to be reliable. The customer is thereby not absolved from carefully checking all supplies immediately on receipt. The recommendations made in this catalogue should be checked by preliminary trials because of conditions during processing over which we have no control, especially where other companies' raw materials are also being used. Before using, user shall determine the suitability of the product for its intended use, and the user assumes all risks and liability whatsoever in connection there with. We reserve the right to alter product constants within the scope of technical process or new developments. The recommendations do not absolve the customer from the obligation of investigating the possibility of infringement of third parties right and, if necessary, clarifying the position. Sellers' and manufacturer' only obligation shall be to replace such quantity of the product proved to be defective. Neither seller nor manufacturer shall be liable either in tort or contract for any loss or damage, direct or incidental, or consequential, including loss of profits or revenue arising out of the use or the inability to use a product. No statement, purchase order or recommendations by seller or purchaser not contained herein shall have any force or effect unless in an agreement signed by the officers of the seller and manufacturer.

**30-06-2014**